



Chicago Pneumatic



Air Flex

Air Flex Swivel Connector The 360° Experience

**UNIQUE
FEATURES**
Accessories



PRODUCTION TOOL & TECHNOLOGY
8410 FEAGIN RD
MACON, GA 31216
TOLL FREE: 1-866-546-4663
LOCAL NUMBER: 478-781-8415
FAX: 478-781-0850

- ✓ Flexible
- ✓ Comfortable
- ✓ Smooth



www.cp.com

People. Passion. Performance.

THE FLEXIBILITY OF AIR FLEX



The new CP Air Flex makes all rigid hoses flexible and multi-directional.

EASY: less effort due to hose rigidity, makes work easier in hard to reach areas.


LESS WEAR: no more premature hose wear.

COMFORT AND SAFETY: no twisting, the hose remains in the ideal working position and lower the risk of tendinitis.


CP AIR FLEX RANGE




Air Flex used at 90 degrees 1/4"

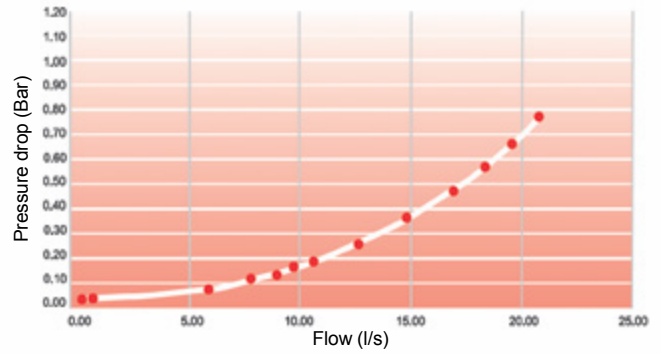

Air Flex used at 90 degrees 1/2" or 3/8"

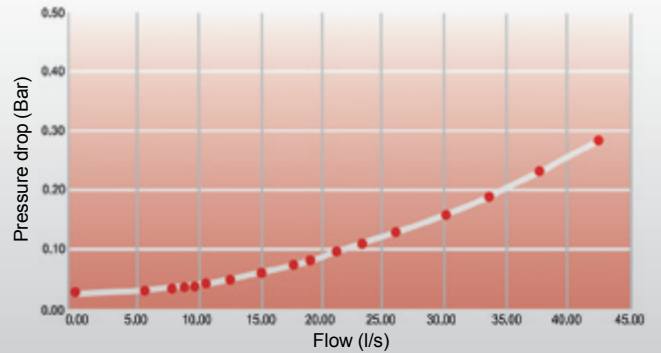

DIMENSIONS

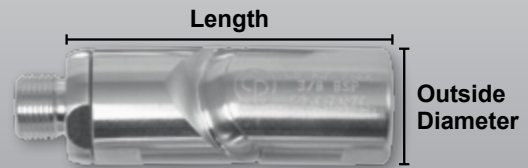

MODEL	PART NUMBER	MAX RECOMMENDED AIR FLOW		FEMALE INLET	MALE INLET	WEIGHT		LENGTH		OUTSIDE DIAMETER	
		l/s	cfm	in.	in.	g	lb	mm	in.	mm	in.
BSP											
Air Flex 1/4"	894 017 1568	12	25	1/4 BSP	1/4 BSP	79	0,17	67	2,63	24,0	0,94
Air Flex 1/4" with cover	894 017 2156	12	25	1/4 BSP	1/4 BSP	79	0,17	67	2,63	24,0	0,94
Air Flex 3/8"	894 017 1570	35	74	3/8 BSP	3/8 BSP	126	0,28	82	3,23	29,5	1,16
Air Flex 1/2"	894 017 1566	35	74	1/2 BSP	1/2 BSP	132	0,29	82	3,23	29,5	1,16
NPT											
Air Flex 1/4"	894 017 1569	12	25	1/4 NPT	1/4 NPT	79	0,17	67	2,63	24,0	0,94
Air Flex 1/4" with cover	894 017 2157	12	25	1/4 NPT	1/4 NPT	79	0,17	67	2,63	24,0	0,94
Air Flex 3/8"	894 017 1571	35	74	3/8 NPT	3/8 NPT	126	0,28	82	3,23	29,5	1,16
Air Flex 1/2"	894 017 1567	35	74	1/2 NPT	1/2 NPT	132	0,29	82	3,23	29,5	1,16



PRODUCTION TOOL & TECHNOLOGY
3410 FEAGIN RD
MACON, GA 31216
TOLL FREE: 1-866-546-4663
LOCAL NUMBER: 478-781-8415
FAX: 478-781-0850

www.cp.com